



**THE GLIDE K RAPID ROLL-UP DOOR** is suitable for applications in supermarkets and sales points; is silent and requires little maintenance. Consist of an enclosed mantle and lower aluminium alloy bar that slides freely in the guides. The lower bar goes back into the guides in the case of accidental impact. The **"K"** line features a motor housed inside the winding tube, which allows installation in corridors and any other limited space, and the opening speed is increased to 2.3 m/s.

## ADVANTAGES

- ✓ Self-repairing
- ✓ Space saving design - no obstructions from the sides and front
- ✓ Motor hidden in the winding shaft
- ✓ Speed 2.3 m/s
- ✓ Maximum quietness
- ✓ Casing that can be opened, with inspection door

## APPLICATIONS

- ✓ Indoors
- ✓ Shop sales area
- ✓ Supermarkets
- ✓ Food sector
- ✓ Incold Panorama Box



## GENERAL TECHNICAL FEATURES

Minimum net free opening width	1000 mm <i>opt: GLIDE K-AL: 1200 mm *</i>
Max dimension	L 3000 x H 3000 mm
Frame	Galvanised steel base, 12/10 Pre-painted cover, 12/10, RAL 9010 Anti-rust drain shoes <i>opt: Skid to increase wind resistance</i> <i>opt: GLIDE K-AL: Aluminium *</i> <i>opt: GLIDE K-IX: 304 12/10 stainless steel base and 304 12/10 stainless steel cover *</i>
Winding shaft	Ø 250 mm
Maximum speed	<i>opening: up to 2.3 m/s (adjustable)</i> <i>closing: 0.8 m/s</i>
Fabric	PVC 900 g/m <sup>2</sup> with a window row Stiffening pipes for L ≥ 2500 mm <i>opt: Insulated 1300 g/m<sup>2</sup> RAL: 5010 - 9010 - 7038</i>
Sliding	Sliding brushes
Electronics	Motorgear: complete with electromagnetic brake and absolute encoder Motor position: housed inside the winding tube Motor control: with inverter card on exclusive Incold IP 66 box Control board: built into the door upright, exclusive Incold IP 66, with Mylar keyboard and message display Automation power supply: 230 V, 1 phase + Neutral + Earth <i>opt: Remote control with iR.VOS system</i>
Opening	Emergency keypad and push button + mushroom push button Ø 90 mm
Wiring	Door supplied pre-wired
Emergency opening	Manual handle <i>opt: Continuity unit (UPS)</i>
Operating temperature	Not suitable to separate chiller and freezer environments. Check the application conditions, R.H. % and thermal delta to prevent condensation of the fabric <i>Insulation kit: gasket, thermal break and seals behind uprights as standard</i>


\* Models on the next page

## standard SAFETY SYSTEMS

### • OPTICAL BARRIERS



Optical barriers in compliance with the EN 12445 standard (only for L ≥ 1000 mm)

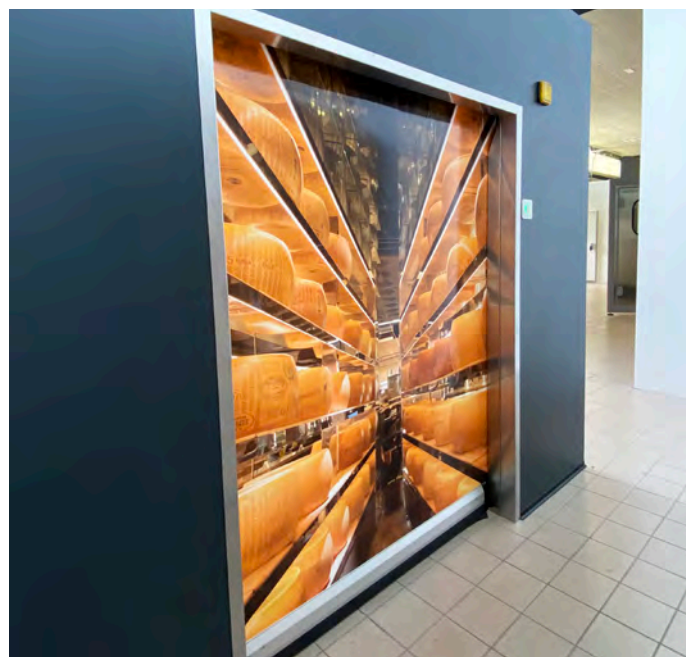

## FABRIC OPTIONS

Custom



2 lines



without window



vision




## AVAILABLE COLOUR/RAL (900 g/m<sup>2</sup> fabric) standard

1003	2004	5010	6026	9016
1021	3002	5012	1013	9005
7035	9006	7037	7038	

## AVAILABLE COLOUR/RAL (1300 g/m<sup>2</sup> fabric) option

5010	9010	7038
------	------	------

## DIMENSIONS

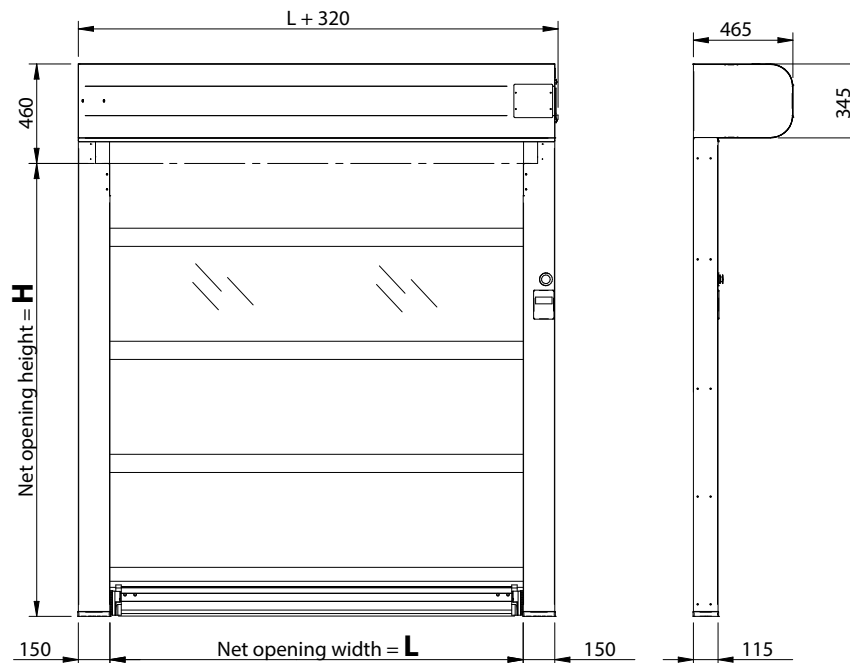

## OTHER MODELS

### GLIDE K-AL

The GLIDE K-AL rapid roll-up door is a variation of the GLIDE K featuring an extruded structure in aluminium monobloc.



#### APPLICATIONS

- ✓ Logistics
- ✓ Large scale distribution
- ✓ Refrigerated warehouses
- ✓ Laboratories
- ✓ Industry
- ✓ Food sector

#### TECHNICAL FEATURES

Frame	Aluminium
-------	-----------

### GLIDE K-IX

The GLIDE K-IX rapid roll-up door is a variation of the GLIDE K, designed for the food sector, and specifically for aggressive environments. Frame and cover are in 304 stainless steel.



#### APPLICATIONS

- ✓ Food industry
- ✓ Aggressive environments
- ✓ Kitchens
- ✓ Laboratories
- ✓ Clean rooms

#### TECHNICAL FEATURES

Frame	304 12/10 stainless steel base
	304 12/10 stainless steel cover