

RÔTA series single-point or three-point rotating locking system with adjustable strike for a perfect seal, especially suitable for very low temperature and large doors.
The combination of composite materials and ergonomic AISI 304 stainless steel levers guarantee high mechanical and corrosion resistance.

Available models:

- RÔTA K1 : single-point closure
- RÔTA K3 : three-point closure

Features

- European-profile cylinder with master key
- Pressure locking system on all fastening points
- Emergency interior handle with photoluminescent arrows



Vertical and depth
adjustment



Suitable for low
temperatures



Interchangeability
left / right



Version with key
available



Fixing inaccessible
with door closed







Easy-to-clean
surfaces



Quick and easy
assembly

model K1

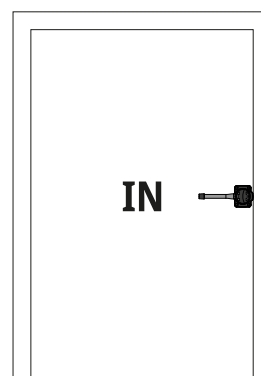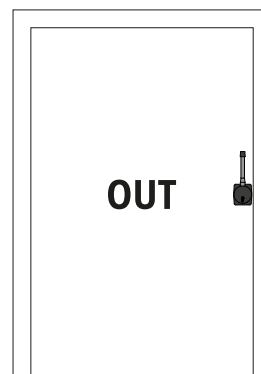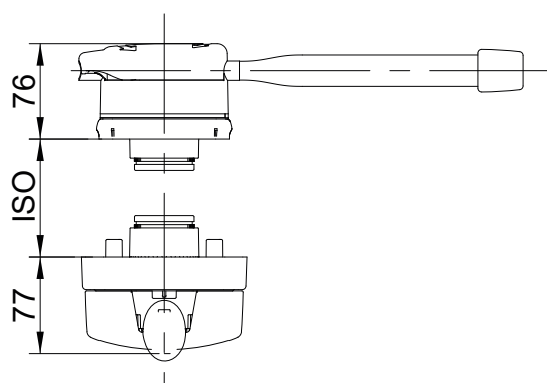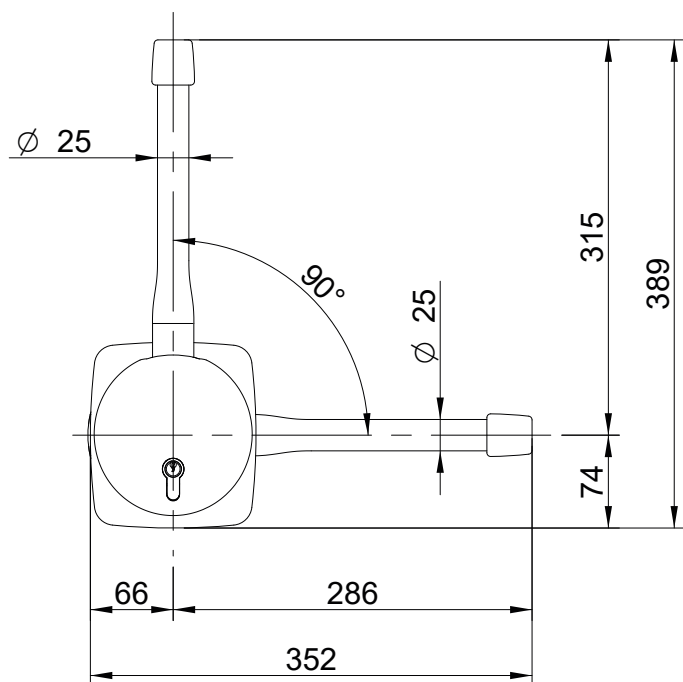

TECHNICAL DATA

Operating temperature	-40° ÷ 40°
Door thickness (ISO)	60, 70, 80, 90, 100, 120, 140 mm
Depth adjustment	+/- 5 mm
Vertical adjustment	+/- 8 mm
Tubular lever	Round section Ø 25mm, in SS AISI 304
Colour	Black RAL 9005

model K3

