

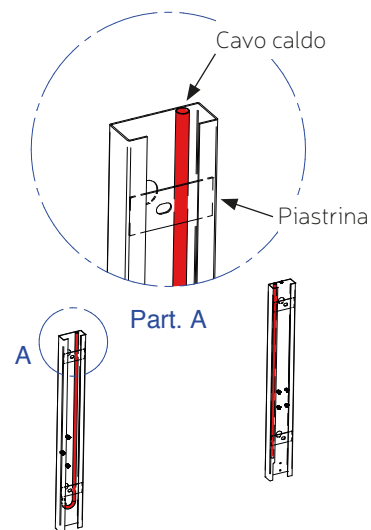


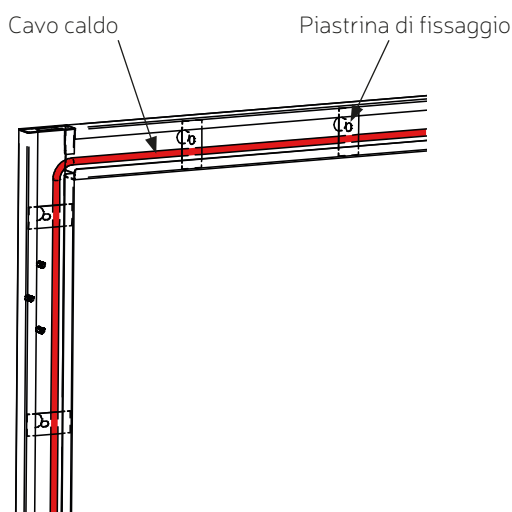

Telaio pressopiegato in acciaio inox spessore 2 mm conformato per garantire solidità e robustezza alla porta.


Caratteristiche del telaio

Applicazione	Porte scorrevoli modelli: SC, SC.09TNG, PSA, SC 2B Porte su cerniera modelli: CE-E, CE2B
Temperature di utilizzo	TN e BT (nella versione BTcon cavo riscaldante da 30W/m)
Finitura	Acciaio Inox scotch brite
Bordatura foro	Profili in Acciaio inox 1mm con finitura scotch brite
Fissaggio	Su pannello e su muratura
Options	Finitura in acciaio inox fioretato

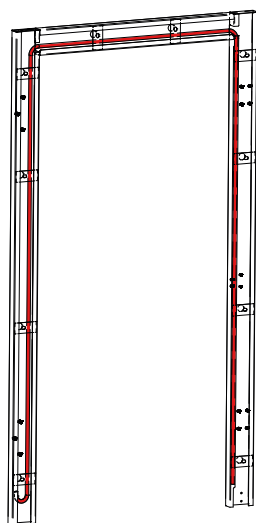


Tipi di fissaggio


Fissaggio su pannello

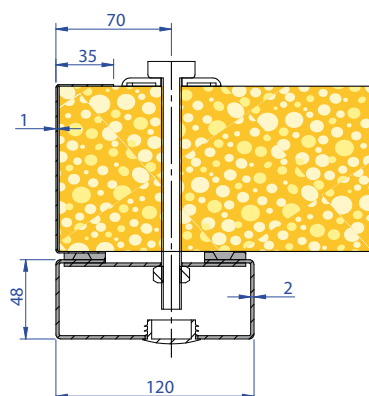

Fissaggio su muratura frontale

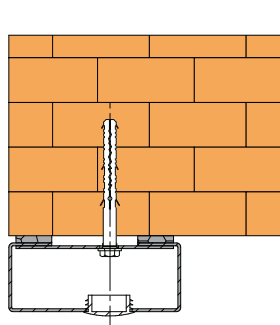

Fissaggio su muratura con imbotte



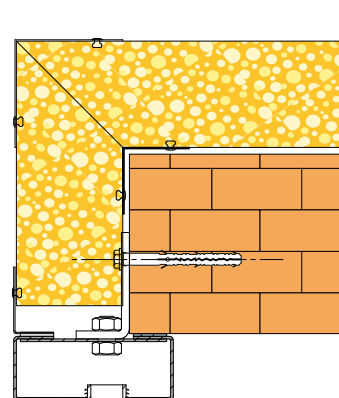




Press-folded stainless steel frame 2 mm thick, designed to guarantee solidity and strength to the door.


Frame features

Application	Sliding doors models: SC, SC.09TNG, PSA, SC 2B Hinged doors models: CE-E, CE2B
Operating temperatures	Chiller and freezer temperatures (in the freezer version with 30W/m heating cable)
Finishing	Scotch brite stainless steel
Door hole edging	1 mm stainless steel profiles with scotch brite finish
Fixing	On panel and brick wall
Options	Finished in decorated stainless steel

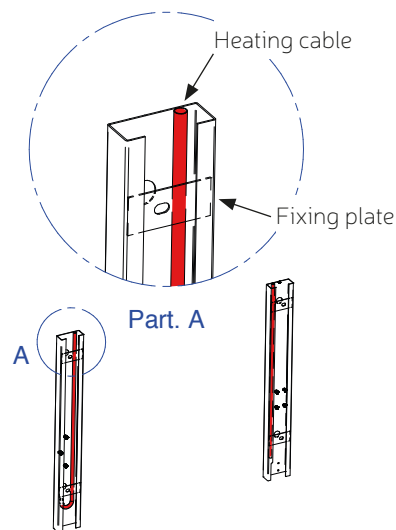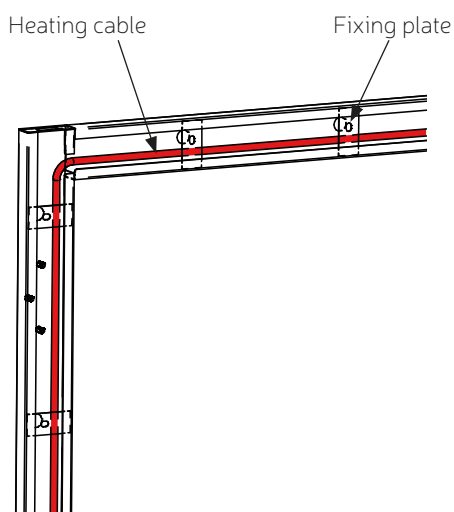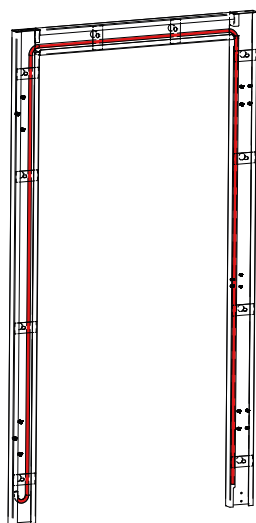


Types of fixing

Fixing on panel

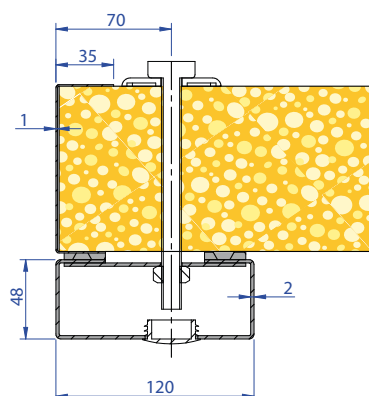

Front fixing on brick wall

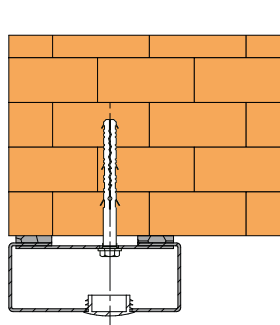

Fixing on brick wall with intrados

