

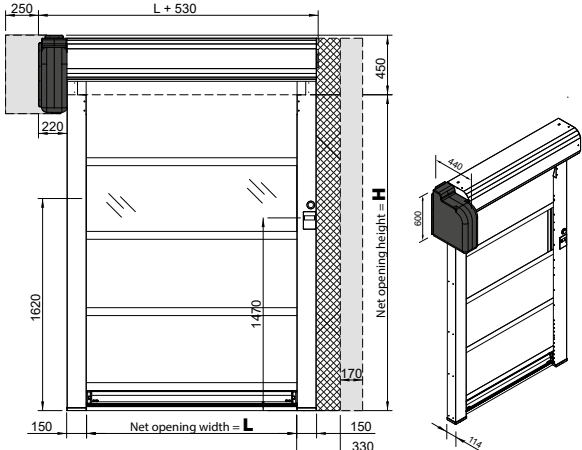
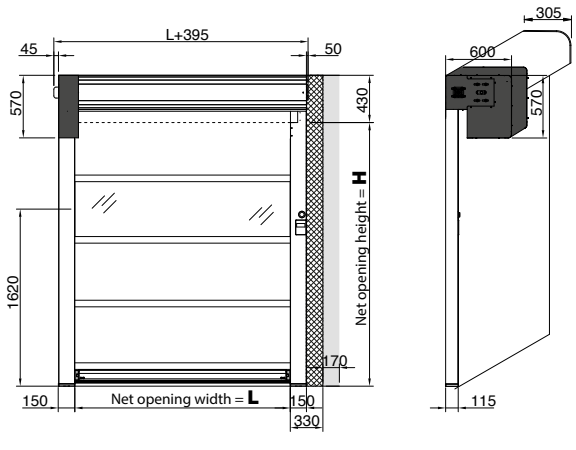


Client	Date
--------	------

Dimensions (net opening) mm (the measures must be indicated in multiples of 50 mm)	L=	H=
---	----	----

Motorgear position	Lateral on the left	Lateral on the right	Frontal on the left*	Frontal on the right*
				
* Counterweight overall dimensions (option) □ extra space for installation/maintenance				

Temperature difference between the two environments (°C)	T=	
--	----	--

Model	GLIDE Frame in white pre-painted steel		GLIDE-AL Frame in aluminium	GLIDE-IX Frame and cover in 304 stainless steel
Frame colour	std. RAL 9010			
	RAL* :		see table "AVAILABLE RAL"	

Safety	Standard safety systems: Optical barriers (only for $L \geq 1000$ mm)			
Fixing	On panel	Panel thickness (mm):		
	OPTION: Stainless steel edging (to cover the cut on the panels)*			
	Opposite to a sliding door	Panel thickness (mm):		
	On metallic structure			
	On masonry			
Portholes				
	1 line (std.)	2 lines*	vision*	without portholes

				AVAILABLE RAL													
Fabric	900 g/m ²	RAL		1003	1021	2004	3002	6026	5010	5012	9005	7037	9006	7038	7035	1013	9016
	Telo personalizzato*																
	1300 g/m ² *	RAL		5010	7038	9010											
Class B-s2,d0 fabric*	900 g/m ² *	RAL		6026	5002	9005	7038	9016									

Nice side of the fabric	Front (motorgear side)	Opposite side of the motorgear
-------------------------	------------------------	--------------------------------

* available with additional price

ADDITIONAL DEVICES*

Remote control with IRMOS		
Opening devices	Pulling cable assembly kit: n°	04071108 Support for rope n°
	Radar assembly kit: n°	03201147 Kit 2 buttons + receiver n°
	04530101 Black push button Ø90 (1 std.) + n°	04302227 Crank 3m n°
	04110302 Numeric keypad with card reader n°	04110505 Infrared touchless sensor (indoor applications) n°
	04530219 Remote control panel 6 m wires n°	04302227 Infrared touchless sensor (industrial applications) n°
	03201425 Remote control (2) + Receiver (1) 5 channels n°	kit for interlocking door system (IRMOS required on both doors)
	04110313 Remote control 5 channels n°	04110314 Receiver for 5 channels transmitter n°
Safety devices	Remote control (2) + Receiver (1) 128 channels n°	04110527 Remote control 128 channels n°
	03201111 Loop detector – two channels kit L=10 m	04110528 Receiver for 128 channels transmitter n°
	04111602 Badge n°	
	03201153 24V micro flash yellow flashing n°	04110305 Single 24V panel flashing yellow with box n°
	04110304 Double 24V panel flashing yellow n°	04302180 Traffic light n°
	04302208 Single 24V panel flashing yellow n°	04302537 24v 220ma siren 65 decibel with flashing light n°
	Automatic counterweight system	Manual counterweight system
	04302583 UPS panel + plug (backup power supply, in case of fault in the power supply)	04181586 Stand for UPS housing
	04110282 Relay fo UPS	02030109 / 02030110 Door protection pole H n°
	Box gasket (std insulated fabrics)	Junction box
	304 stainless steel cover (uprights and box) (for GLIDE model)	04071018 Document tray 220x310x55 n°
04016075 Chain oil 400 ml n°		

Notes

* available with additional price

La riproduzione non autorizzata è vietata per tutti i contenuti di questo documento di proprietà di Incold S.p.A. | Unauthorized reproduction is prohibited for all content of this document as property of Incold S.p.A.