

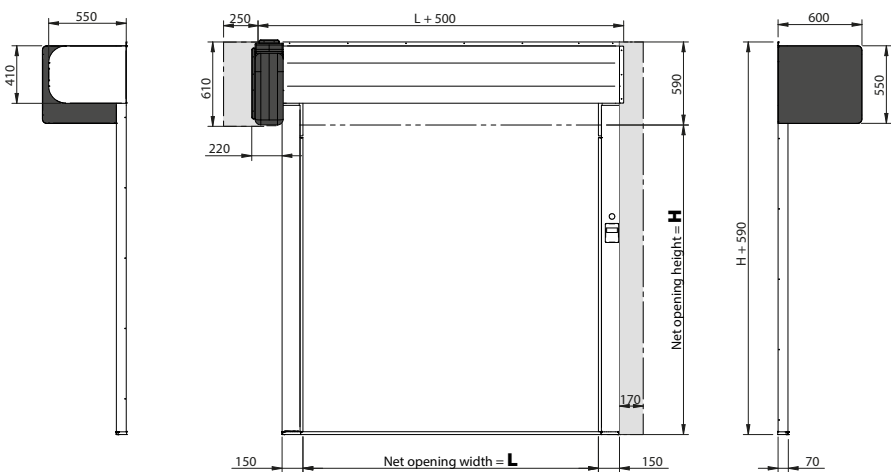


Client				Date	
Dimensions (net opening) mm (the measures must be indicated in multiples of 50 mm)		L=		H=	
Motorgear position	Lateral on the left		Lateral on the right		
					
extra space for installation/maintenance					
Temperature difference between the two environments (°C)		T=			
Model	ZIP ISO 7 Frame in white pre-painted steel		ZIP-IX Frame in 304 stainless steel		
Frame colour	std. RAL 9010				
	RAL* :		see table "AVAILABLE RAL"		
Safety	Standard safety systems: Optical barriers (only for L ≥ 1000 mm)		Option: Wireless safety edge + Photoelectric cell (RX+TX)*		
Fixing	On panel		Panel thickness (mm):		
	OPTION: Stainless steel edging (to cover the cut on the panels)*				
	Opposite to a sliding door		Panel thickness (mm):		
	On metallic structure				
On masonry					
Nice side of the fabric	Front (motorgear side)		Opposite side of the motorgear		

* available with additional price

ADDITIONAL DEVICES*

Remote control with IRMOS		
Opening devices	Pulling cable assembly kit: n°	04071108 Support for rope n°
	Radar assembly kit: n°	03201147 Kit 2 buttons + receiver n°
	04530101 Black push button Ø90 (1 std.) + n°	04110505 Crank 1m n°
	04110302 Numeric keypad with card reader n°	04302227 Crank 3m n°
	03201425 Remote control (2) + Receiver (1) 5 channels n°	04302227 Infrared touchless sensor (indoor applications) n°
	04110313 Remote control 5 channels n°	04110314 Infrared touchless sensor (industrial applications) n°
	04110527 Remote control 128 channels n°	kit for interlocking door system (IRMOS required on both doors)
Safety devices	03201111 Loop detector – two channels kit L=10 m	04110313 Receiver for 5 channels transmitter n°
	04111602 Badge n°	04110528 Receiver for 128 channels transmitter n°
	03201153 24V micro flash yellow flashing n°	04110305 Single 24V panel flashing yellow with box n°
	04110304 Double 24V panel flashing yellow n°	04302180 Traffic light n°
	04181586 Stand for UPS housing	04302583 UPS panel + plug (backup power supply in case of fault in the power supply)
	02030109 / 02030110 Door protection pole H n°	04110282 Relay fo UPS
	Heating cable with thermostat (anti-condensation)	Junction box
	304 stainless steel cover (uprights and box)	04071018 Document tray 220x310x55 n°
400V 3F / 220V 1F Transforme		

Notes

* available with additional price

La riproduzione non autorizzata è vietata per tutti i contenuti di questo documento di proprietà di Incold S.p.A. | Unauthorized reproduction is prohibited for all content of this document as property of Incold S.p.A.