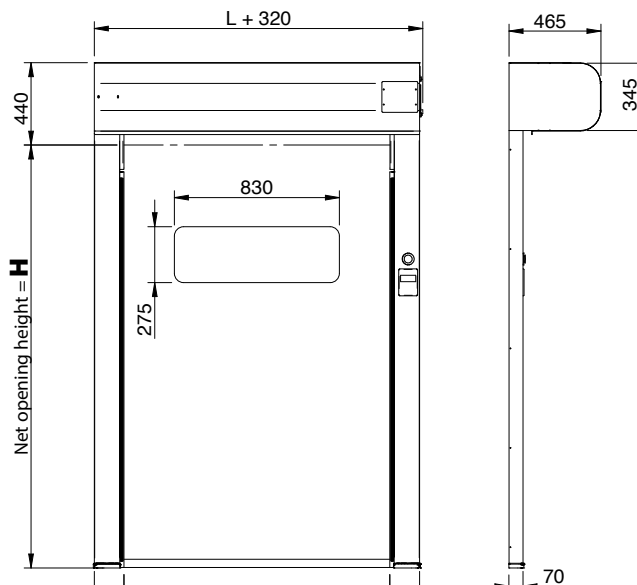
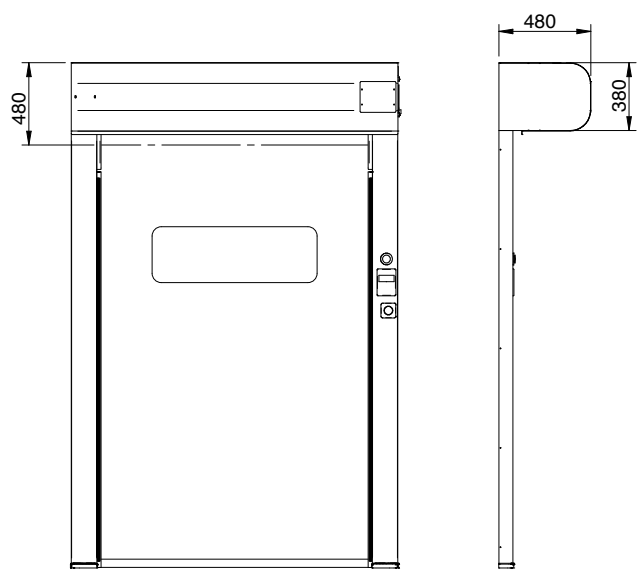


Client		Date	
--------	--	------	--

Dimensions (net opening) mm - max 3000x3000 (the measures must be indicated in multiples of 50 mm)	L=		H=	
---	----	--	----	--

With fabric 900 g/m ²	With fabric 1300 g/m ²
	

Temperature difference between the two environments (°C)	T=	
--	----	--

Model	ZIP K	ZIP K-AL	ZIP K-IX
	Frame in white pre-painted steel	Frame in aluminium	Frame in 304 stainless steel
Frame colour	std. RAL 9010		
	RAL* :	see table "AVAILABLE RAL"	

Safety	Standard safety systems: Optical barriers (only for L ≥ 1000 mm)	Option: Wireless safety edge + Photoelectric cell (RX+TX)*
--------	---	---

Fixing	On panel	Panel thickness (mm):	
	OPTION: Stainless steel edging (to cover the cut on the panels)*		
	Opposite to a sliding door	Panel thickness (mm):	
	On metallic structure		
	On masonry		

Portholes							
	1 line (std.)	2 lines*	high visibility*	without portholes	1 line exit*	without portholes exit*	vision*

		AVAILABLE RAL															
Fabric	900 gr/m ²	RAL		1003	1021	2004	3002	6026	5010	5012	9005	7037	9006	7038	7035	1013	9016
	Customized fabric*																
	1300 gr/m ² *	RAL		5010	7038	9010											
Class B-s2,d0 fabric*	900 gr/m ² *	RAL		6026	5002	9005	7038	9016									

Nice side of the fabric	Front (motorgear side)	Opposite side of the motorgear
-------------------------	------------------------	--------------------------------

* available with additional price

La riproduzione non autorizzata è vietata per tutti i contenuti di questo documento di proprietà di Incold S.p.A. | Unauthorized reproduction is prohibited for all content of this document as property of Incold S.p.A.

ADDITIONAL DEVICES*

Remote control with IRMOS		
Opening devices	Pulling cable assembly kit: n°	04071108 Support for rope n°
	Radar assembly kit: n°	04110505 Infrared touchless sensor (indoor applications) n°
	04530101 Black push button Ø90 (1 std.) n°	04530219 Remote control panel 6 m wires n°
	04110302 Numeric keypad with card reader n°	04110313 Remote control 5 channels n°
	03201425 Remote control (2) + Receiver (1) 5 channels n°	04110314 Receiver for 5 channels transmitter n°
	Remote control (2) + Receiver (1) 128 channels n°	04110527 Remote control 128 channels n°
03201111 Loop detector – two channels kit L=10 m		
03201147 Kit 2 buttons + receiver n°		
04302227 Infrared touchless sensor (industrial applications) n°		
kit for interlocking door system (IRMOS required on both doors)		
04110528 Receiver for 128 channels transmitter n°		
04111602 Badge n°		

Safety devices	03201153 24V micro flash yellow flashing n°	04110305 Single 24V panel flashing yellow with box n°
	04110304 Double 24V panel flashing yellow n°	04302180 Traffic light n°
	04181586 Stand for UPS housing	04302583 UPS panel + plug (backup power supply, in case of fault in the power supply)
	02030109 / 02030110 Door protection pole H n°	04302208 Single 24V panel flashing yellow n°
04302537 24v 220ma siren 65 decibel with flashing light n°		
04110282 Relay for UPS		

Box gasket (std insulated fabrics)	Junction box	400V 3F / 220V 1F Transforme
304 stainless steel cover (uprights and box) (for ZIP K model)	04071018 Document tray 220x310x55 n°	

Notes

* available with additional price

La riproduzione non autorizzata è vietata per tutti i contenuti di questo documento di proprietà di Incold S.p.A. | Unauthorized reproduction is prohibited for all content of this document as property of Incold S.p.A.